

**«Гранпамп»
ЦНВ**

ЦНБ 32
2950 об./мин.

Top Graph: Head H [m] vs Flow Q [m³/h]


The top graph shows the head H [m] on the y-axis (0 to 10) versus flow Q [m³/h] on the x-axis (0 to 11). Two performance curves are shown:

- 32-8-0.37/2 (Solid line):** Head starts at approximately 10.2 m at Q=0 and decreases to about 6.5 m at Q=11. Data points are marked at Q=4.5 (50%), Q=5.5 (55%), Q=6.5 (60%), Q=7.5 (62%), Q=8.5 (65%), Q=9.5 (68%), Q=10.5 (70%), and Q=11.5 (68%).
- 32-4-0.37/2 (Solid line):** Head starts at approximately 6.5 m at Q=0 and decreases to about 4.2 m at Q=8.5. Data points are marked at Q=7.5 (62.2%) and Q=8.5 (62%).

Bottom Graph: Power P2 [kW] vs Flow Q [m³/h]

The bottom graph shows the power P2 [kW] on the y-axis (0.0 to 0.3) versus flow Q [m³/h] on the x-axis (0 to 11). Two power curves are shown:

- 32-8-0.37/2 (Solid line):** Power increases from approximately 0.12 kW at Q=0 to about 0.28 kW at Q=11.
- 32-4-0.37/2 (Solid line):** Power increases from approximately 0.08 kW at Q=0 to about 0.15 kW at Q=8.5.



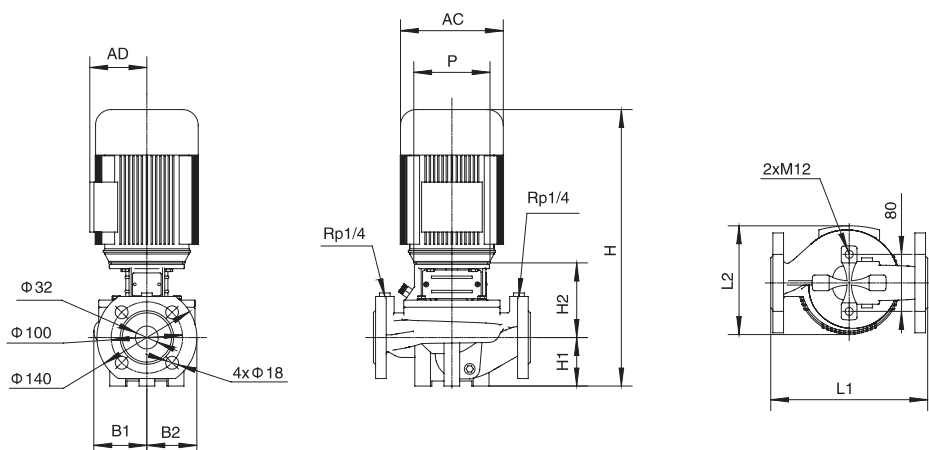


Модель	L1 (мм)	L2 (мм)	H (мм)	H1 (мм)	H2 (мм)	B1 (мм)	B2 (мм)	P (мм)	AD (мм)	AC (мм)
ЦНВ 32-8-0.37/2	220	175	386	68	104.5	75	70	105	105	130
ЦНВ 32-4-0.37/2										

ВЕРТИКАЛЬНЫЕ НАСОСЫ С ЛИНЕЙНЫМ РАСПОЛОЖЕНИЕМ ПАТРУБКОВ ЦНВ

«Гранпамп»
ЦНВ

Насосы серии ЦНВ 32-XX-XX/XX, 2950 об./мин

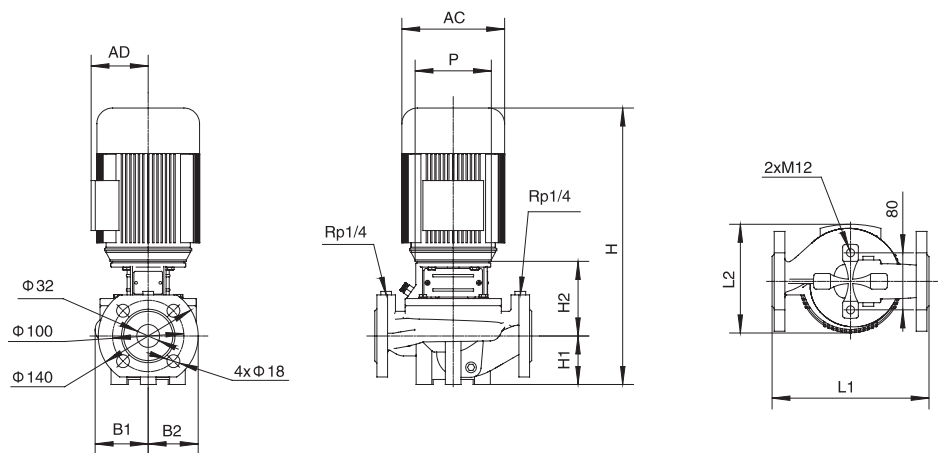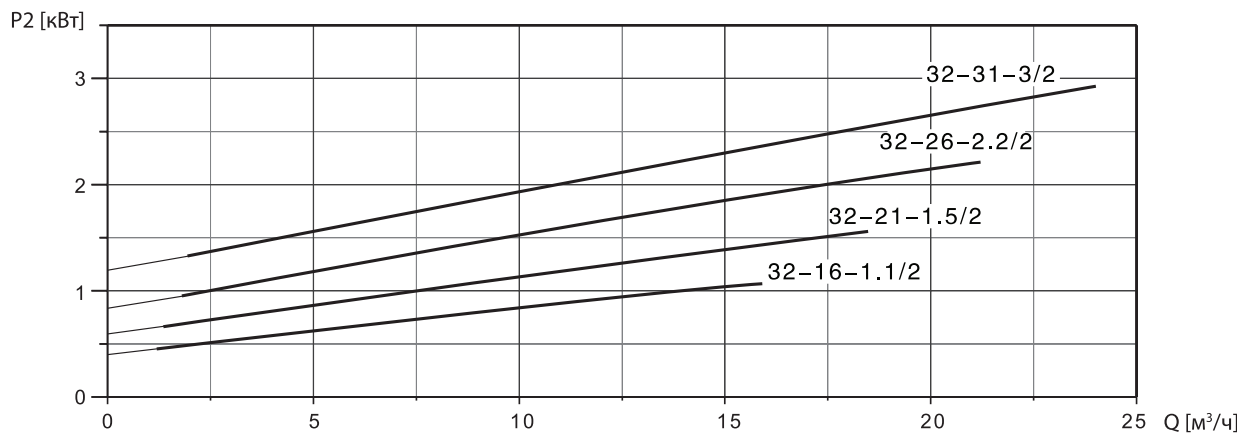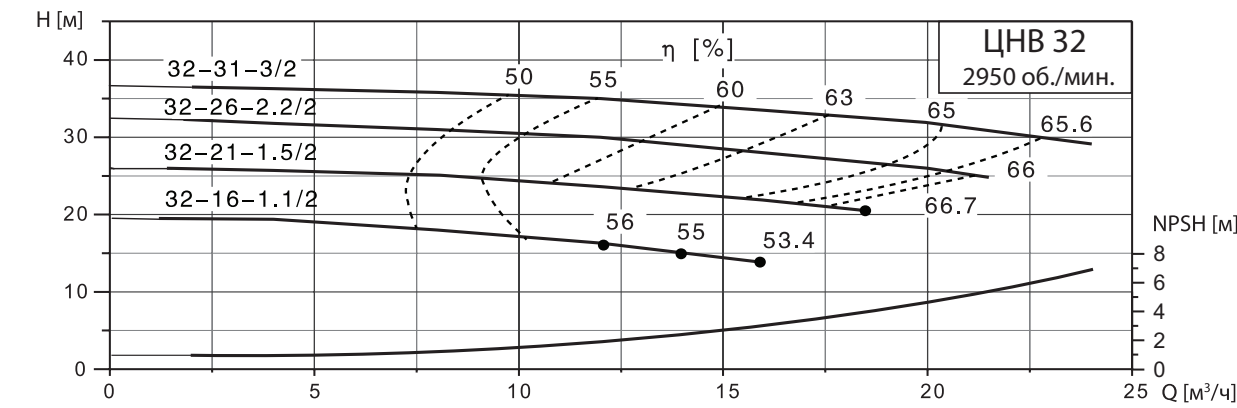



Размеры

Модель	L1 (мм)	L2 (мм)	H (мм)	H1 (мм)	H2 (мм)	B1 (мм)	B2 (мм)	P (мм)	AD (мм)	AC (мм)
ЦНВ 32-31-3/2	340	246	641	130	171	123	123	160	119.5	186
ЦНВ 32-26-2.2/2	340	250.5	618.5	130	171	123	123	140	127.5	164
ЦНВ 32-21-1.5/2	340	250.5	618.5	130	171	123	123	140	127.5	164
ЦНВ 32-16-1.1/2	340	247.5	568.5	130	171	123	123	120	124.5	150

ВЕРТИКАЛЬНЫЕ НАСОСЫ С ЛИНЕЙНЫМ РАСПОЛОЖЕНИЕМ ПАТРУБКОВ ЦНВ

«Гранпамп»
ЦНВ

Насосы серии ЦНВ 32-XX-XX/XX, 2950 об./мин

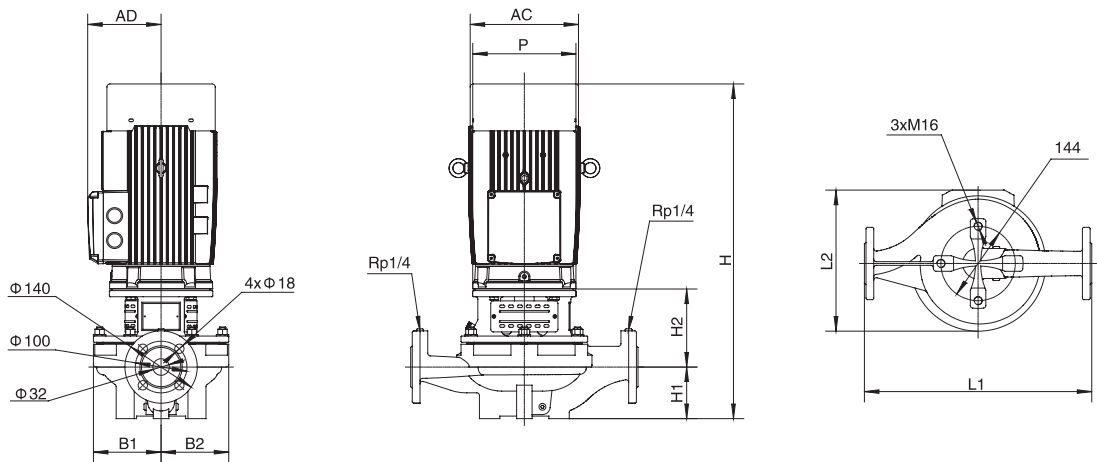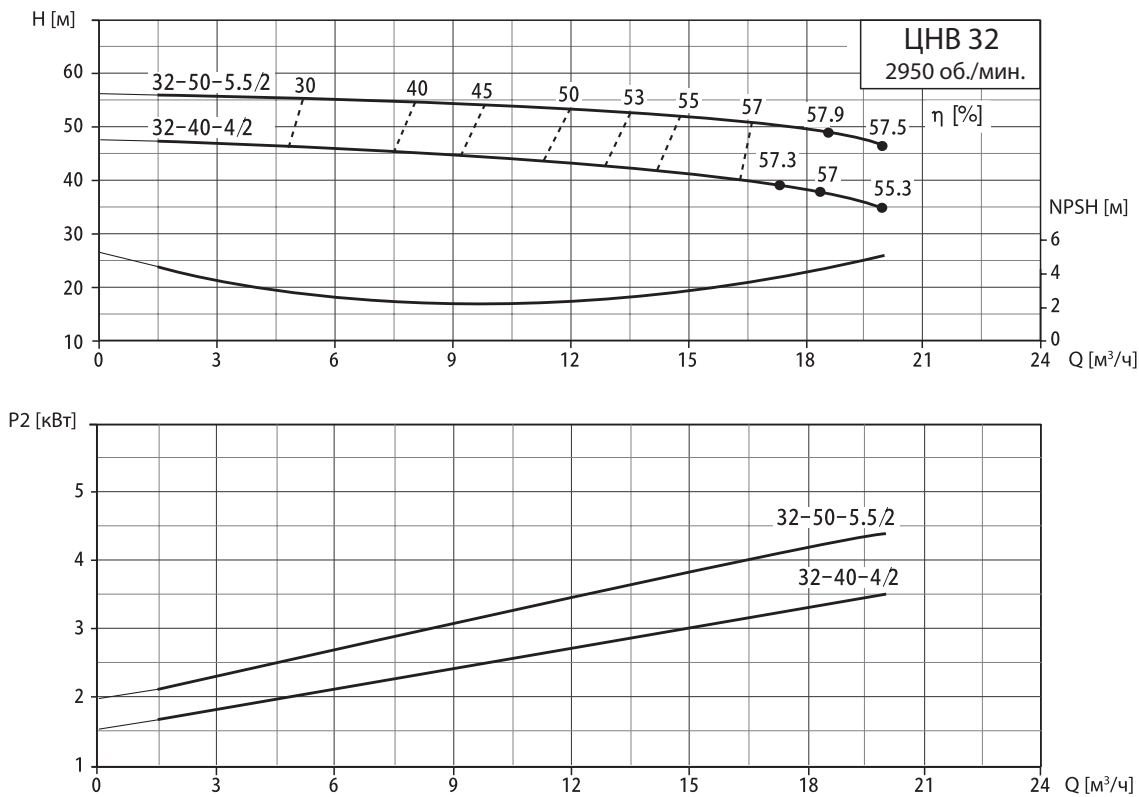

Размеры

Модель	L1 (мм)	L2 (мм)	H (мм)	H1 (мм)	H2 (мм)	B1 (мм)	B2 (мм)	P (мм)	AD (мм)	AC (мм)
ЦНВ 32-50-5.5/2	440	273.5	785	135	151	131	131	Φ200	175	254
ЦНВ 32-40-4/2	440	262	699	135	166	131	131	Φ160	143	210